


1-4

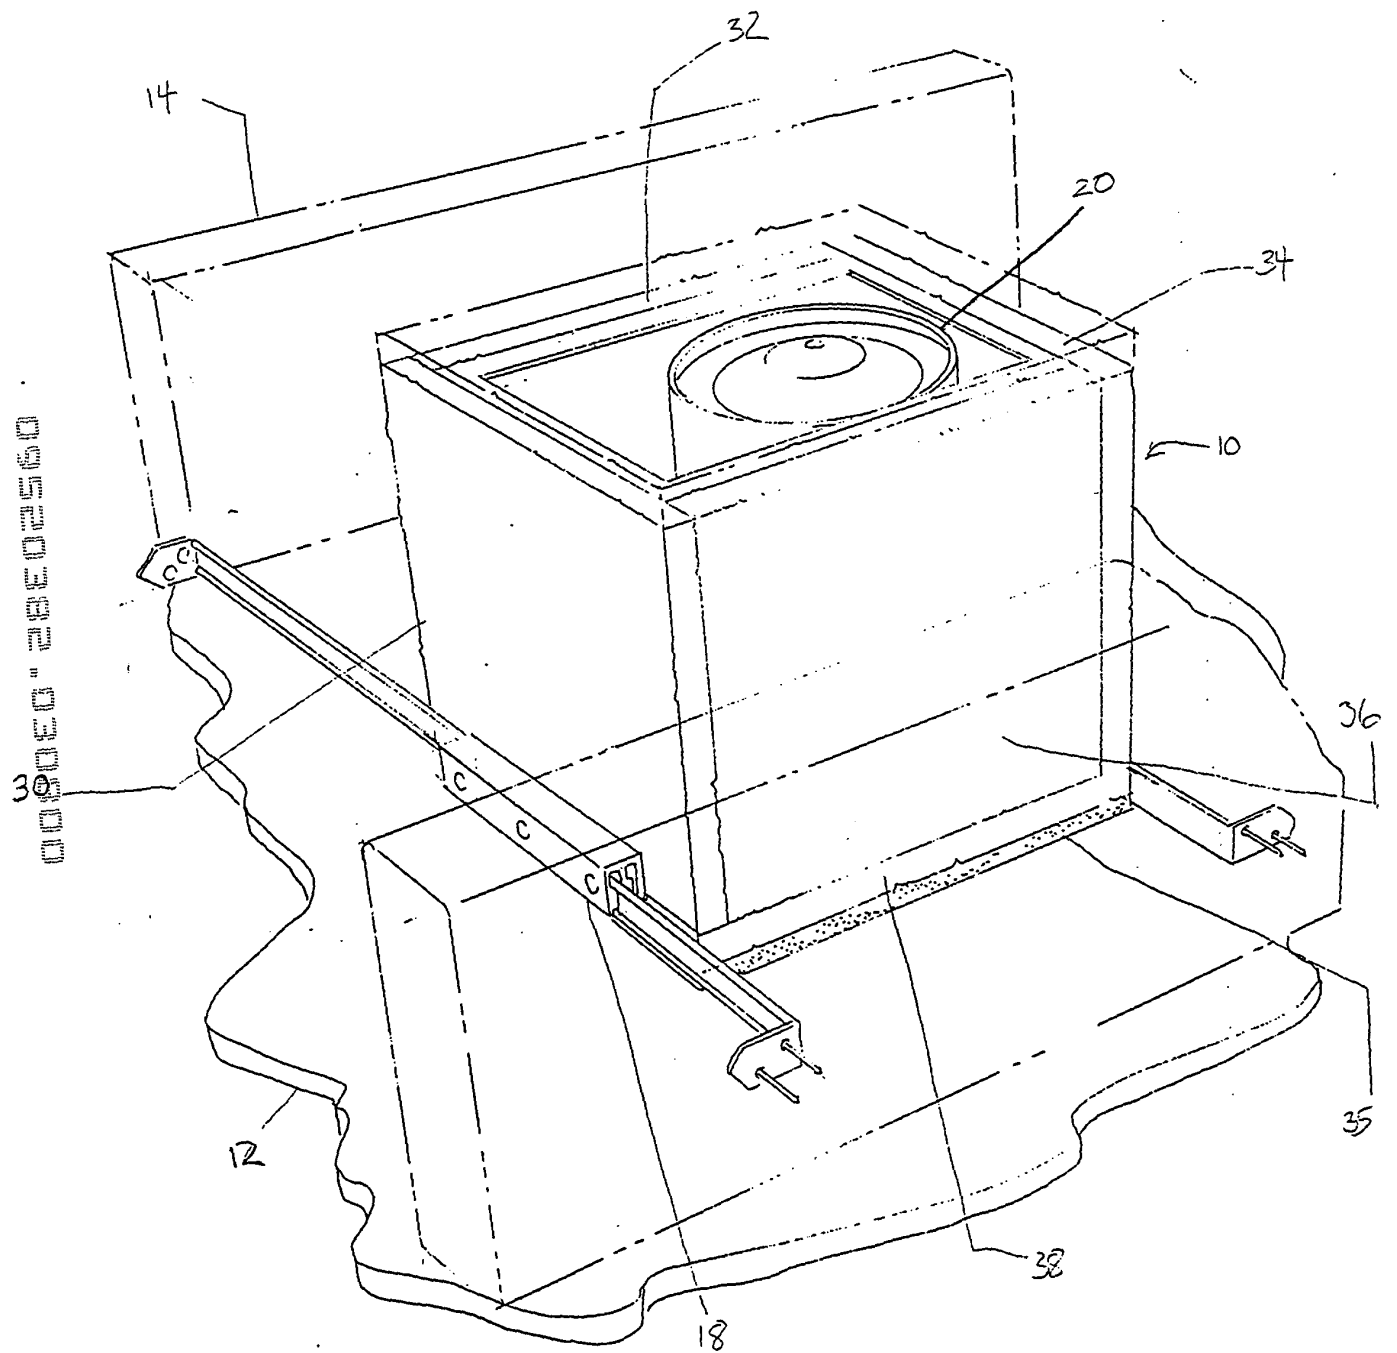

00520382-030000

179/

Fig. 1


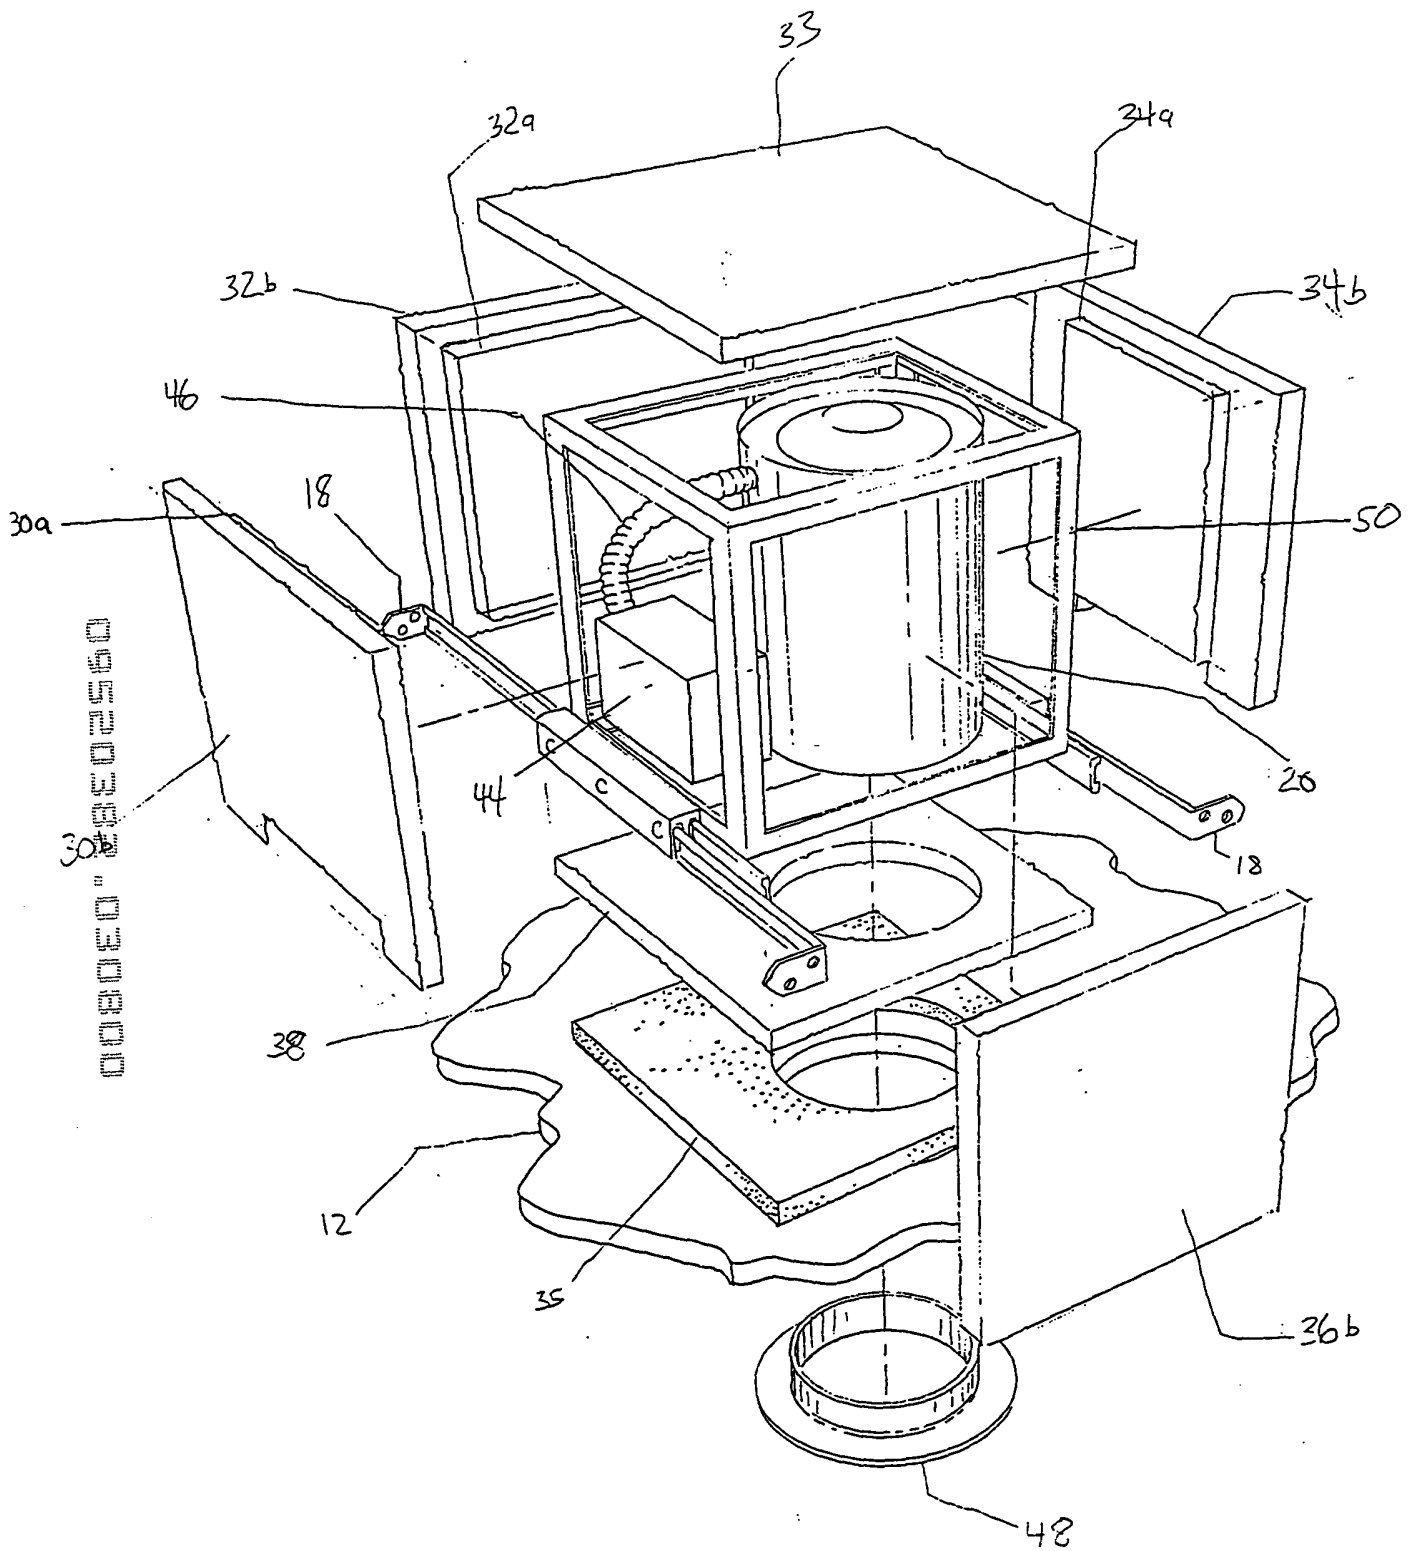


Fig. 2

Fig. 3

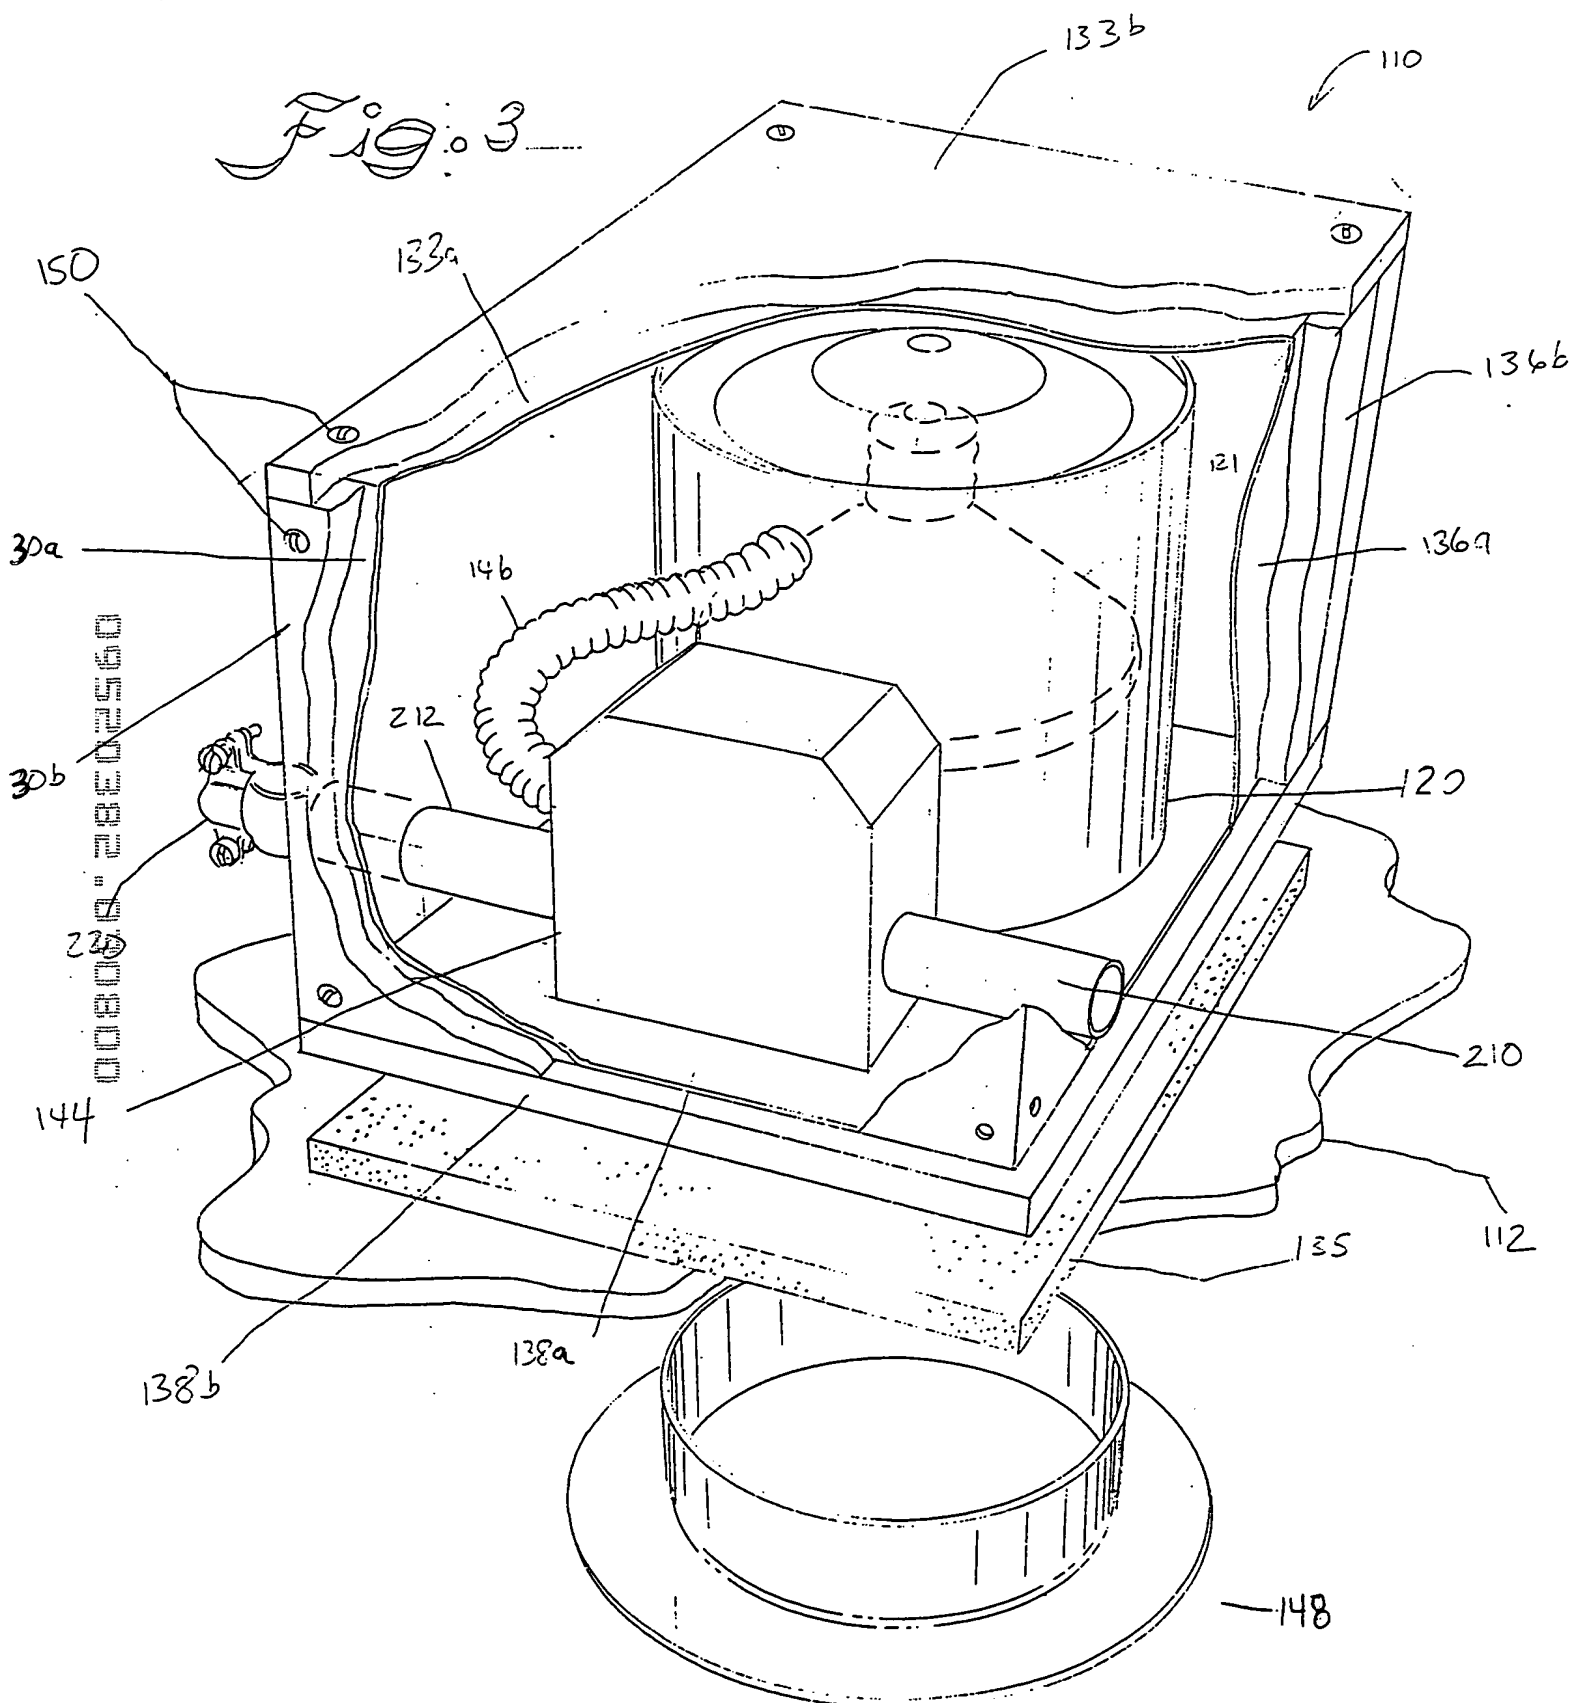

This diagram shows an exploded perspective view of a device assembly. A rectangular housing, labeled 350, is shown with its front panel removed. Inside the housing, there is a control unit with two buttons and two indicator lights. A flexible, corrugated tube, labeled 346, is connected to the control unit. The housing is mounted on a base, which is shown in an exploded view. The base includes a track, labeled 312, and a sliding component, labeled 315. The control unit is also shown in an exploded view, with a label 344 pointing to its side. The diagram illustrates the relationship between the housing, the control unit, the flexible tube, and the base components.

,



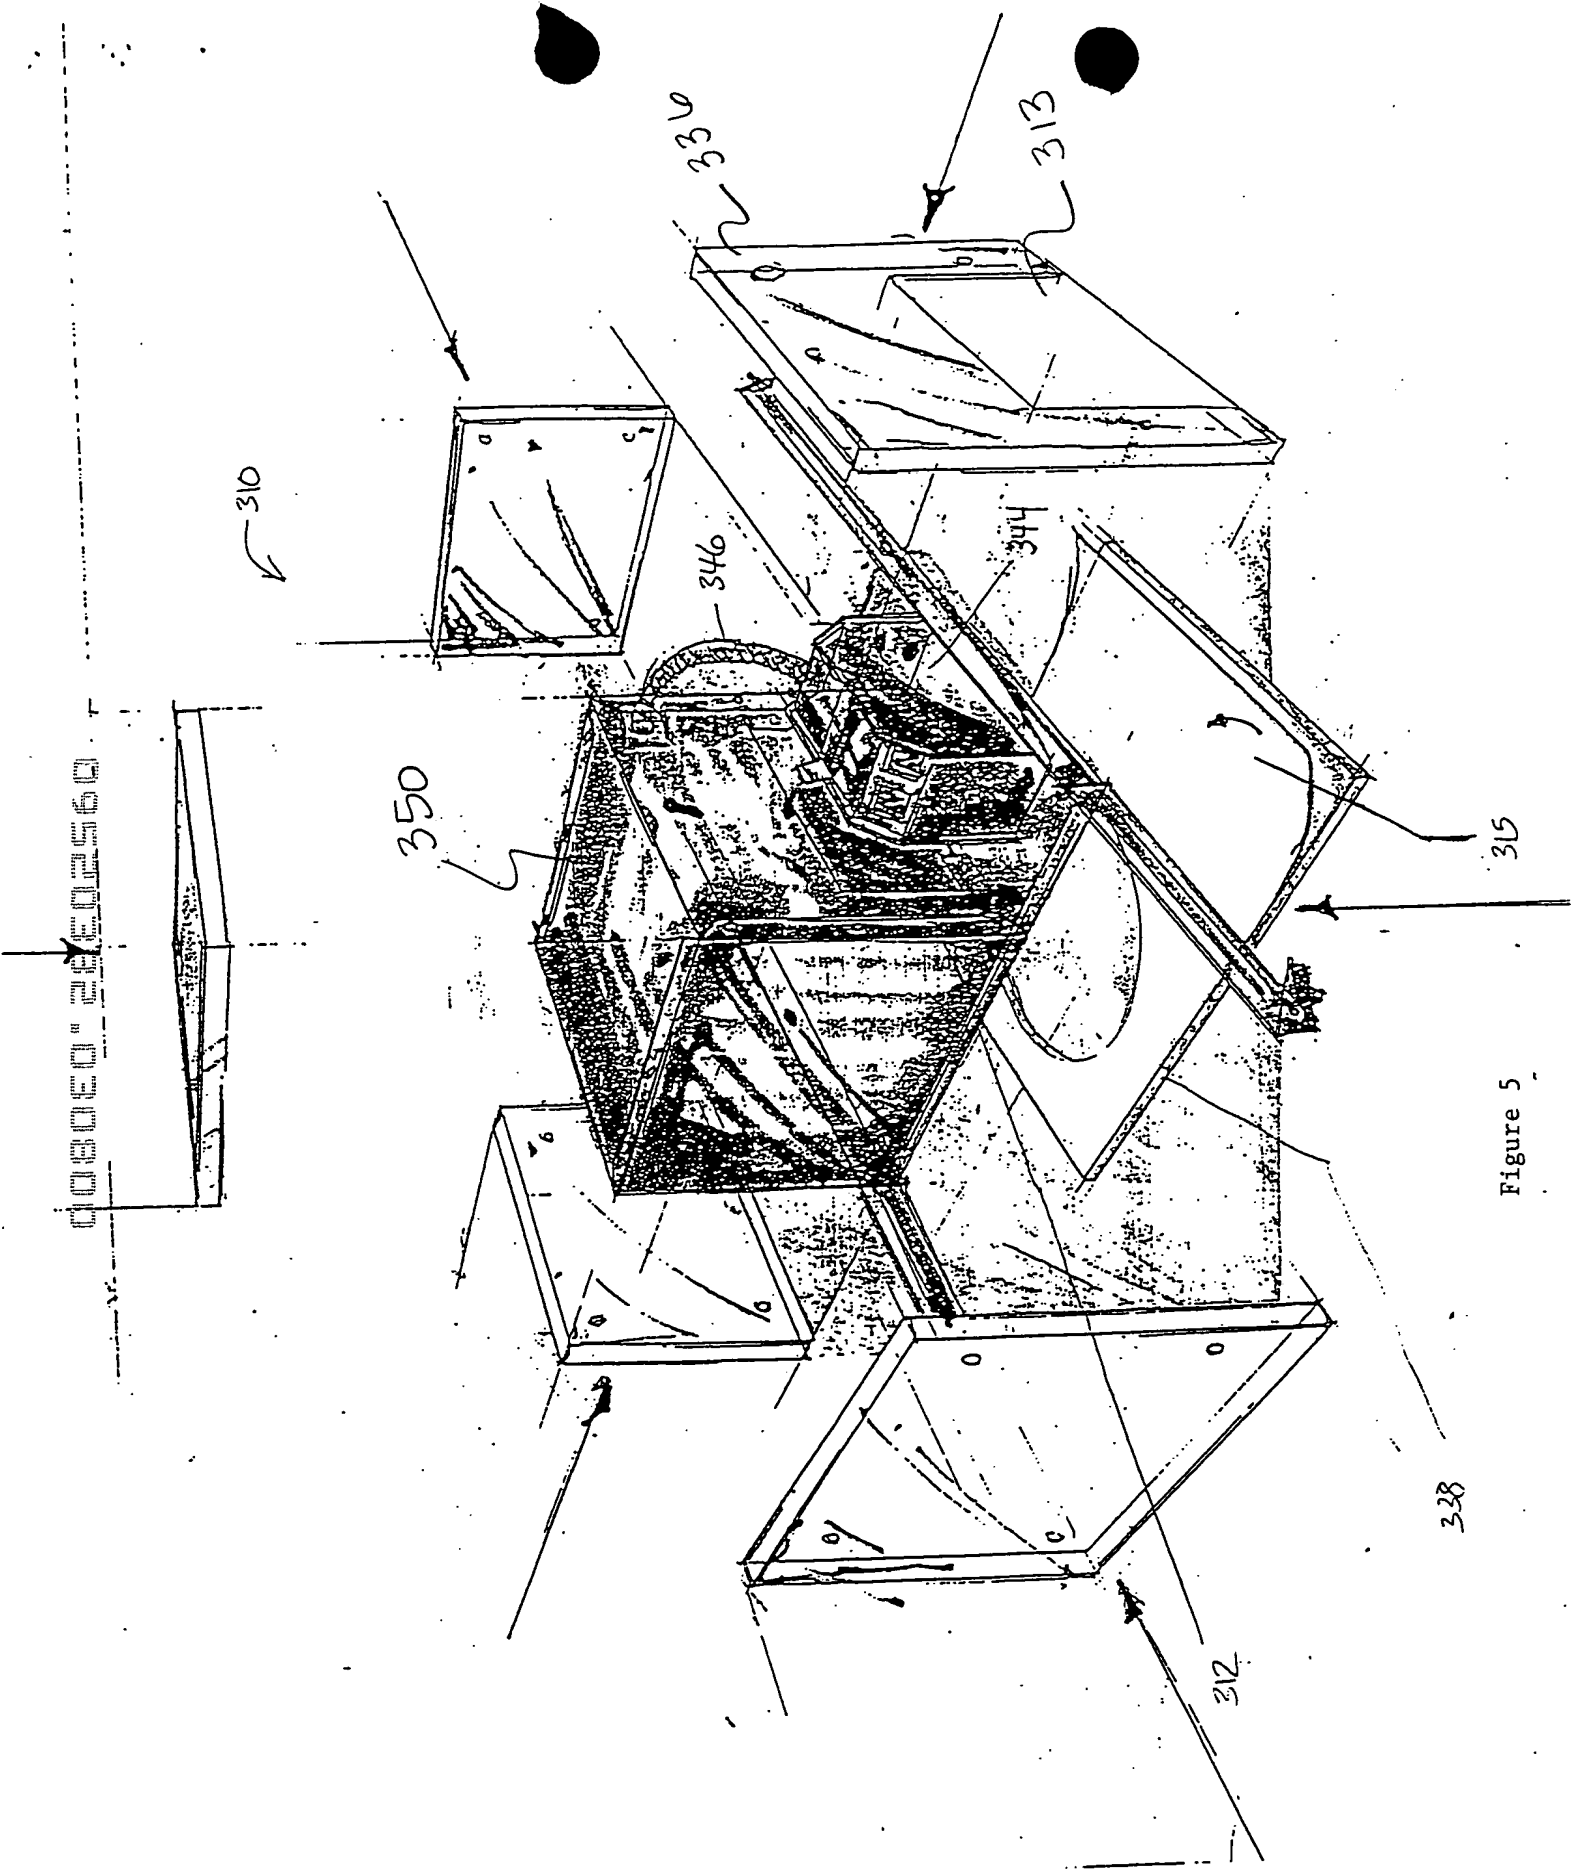


Figure 5

BEST AVAILABLE COPY

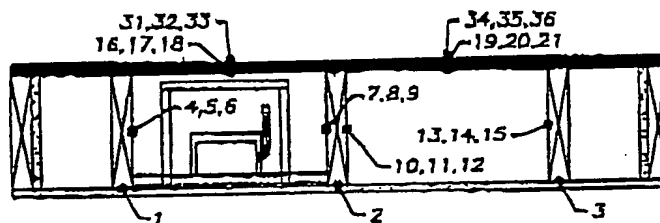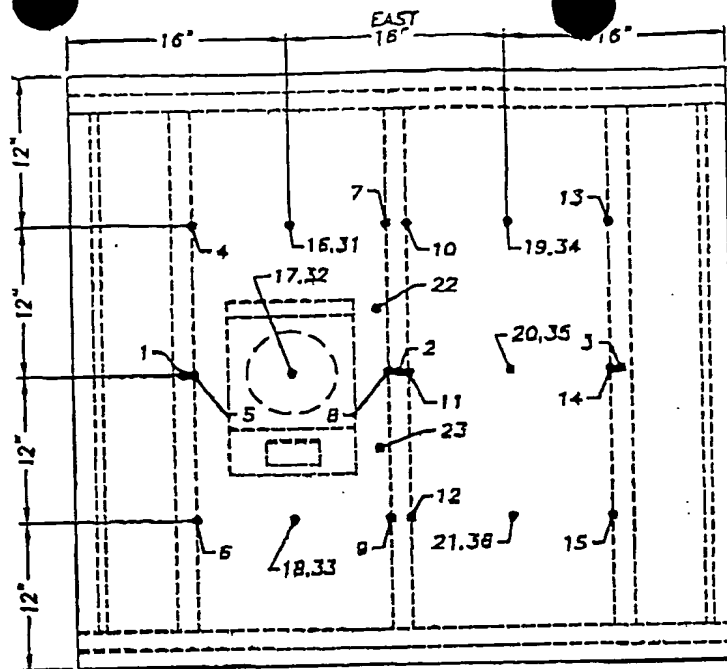

TC Nos.	Location
1-3	On bottom face of wood joist between wood joist and wallboard
4-15	On wood joist face at midheight
16-21	On underside of plywood flooring
22-30	On fixture within joist cavity
31-36	On unexposed surface

Thermocouple Locations

Figure 6

BEST AVAILABLE COPY